

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 07-191930

(43)Date of publication of application : 28.07.1995

(51)Int.Cl.

G06F 13/10  
G06F 13/36

(21)Application number : 05-331351

(71)Applicant : NEC CORP

(22)Date of filing : 27.12.1993


(72)Inventor : SUGIMOTO KINICHI

## (54) INTERFACE FOR DISK DEVICE AND CONTROL METHOD THEREFOR

## (57)Abstract:

PURPOSE: To improve the throughput of a disk and the response of sequential data access by providing a bus for command processing and a bus for data processing independently of each other in the interface for disk device of a computer.

CONSTITUTION: This interface for disk device DK consists of a command data encoding mechanism 1 which generates a command packet from a corresponding disk device code and a disk I/O control command in response to a data read or write request from a host, a disk interface control mechanism 2 which receives the command packet issued from the command data encoding mechanism 1, a disk device DK executed by the disk interface control mechanism, a route setting mechanism which discriminates the shortest transfer path, and a data path router 3 which continuously secures a path for the purpose of continuously transferring data.

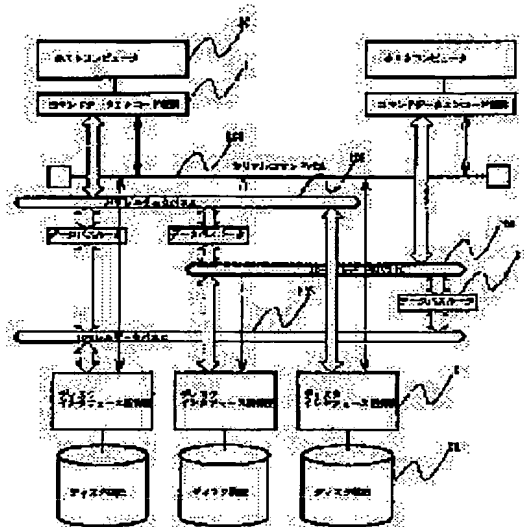

## LEGAL STATUS

[Date of request for examination]

16.03.1995

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

2723022

[Date of registration]

28.11.1997

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office